

# KODAK VISION3 500T Color Negative Film 5219 / 7219 / SO-219

Kodak

## TECHNICAL DATA / COLOR NEGATIVE FILM

November 2007 • H-1-5219t

The first in a new family of films, VISION3 500T Film gives you more control and flexibility at every phase of the filmmaking process—from capture through post, in both digital and traditional workflows.

VISION3 500T Film retains the overall look and image structure of KODAK VISION2 Films—then adds technical innovations that provide improved exposure latitude—at both ends of the curve. Proprietary, advanced Dye Layering Technology (DLT) gives you noticeably reduced grain in shadows, so you can shoot at higher speeds, with less light, in darker corners, and know you can capture an amazing amount of shadow detail with noticeably lower grain.

VISION3 500T Film also features extended highlight latitude, so you can follow the action into bright light-in a single shot-without worrying about blown-out details. When the film is scanned and digitized, you'll find you can recover two stops of highlight detail. This technology is enabled by the use of sub-micron imaging sensors.

VISION3 500T Film fits seamlessly into your digital workflow. And when scanning low-light scenes, VISION3 500T Film yields higher signal-to-noise ratios for unprecedented image quality.

### BASE

KODAK VISION3 500T Color Negative Films 5219 and 7219 have an acetate safety base with rem-jet backing.

KODAK VISION3 500T Color Negative Film SO-219 has an ESTAR Safety Base with rem-jet backing

### STORAGE

Store unexposed film at 13°C (55°F) or lower. For extended storage, store at -18°C (0°F) or lower. Process exposed film promptly. Store processed film according to the recommendations in ANSI/PIMA IT9.11-1998: for medium-term storage (minimum of ten years), store at 10°C (50°F) or lower at a relative humidity of 20 to 30 percent; for extended-term storage (for preservation of material having permanent value), store at 2°C (35°F) or lower at a relative humidity of 20 to 30 percent. For active use, store at 25°C (77°F) or lower, at a relative humidity of 50 +/- 5 percent. This relates to optimized film handling rather than preservation; static, dust-attraction and curl-related problems are generally minimized at the higher relative humidity. After usage, the film should be returned to the appropriate medium- or long-term storage conditions as soon as possible.

For more information about medium- and long-term storage, see ANSI/PIMA IT9.11-1998, SMPTE RP131-2002, and KODAK Publications No. H-1, *KODAK Motion Picture Film* and No. H-23, *The Book of Film Care*.

### EXPOSURE INDEXES

Tungsten (3200K) - 500 Daylight<sup>1</sup> - 320

Use these indexes with incident- or reflected-light exposure meters and cameras marked for ISO or ASA speeds or exposure indexes. These indexes apply for meter readings of average subjects made from the camera position or for readings made from a gray card of 18-percent reflectance held close to and in front of the subject. For unusually light- or dark-colored subjects, decrease or increase the exposure indicated by the meter accordingly.

### COLOR BALANCE

These films are balanced for exposure with tungsten illumination (3200K). You can also expose them with tungsten lamps that have slightly higher or lower color temperatures (+/- 150K) without correction filters, since final color balancing can be done in printing. For other light sources, use the correction filters in the table below.

Light Source	KODAK Filters on Camera *	Exposure Index
Tungsten (3000 K)	WRATTEN Gelatin No. 82B	320
Tungsten (3200 K)	None	500
Tungsten photoflood (3400 K)	None	500
Daylight (5500 K)	WRATTEN Gelatin No. 85	320
White-Flame Arcs	WRATTEN Gelatin No. 85B	200
Yellow-Flame Arcs	Color Compensating 20Y	320
OPTIMA 32	None	500
VITALITE	WRATTEN Gelatin No. 85	320
Fluorescent, Cool White †	WRATTEN Gelatin No. 85 + 10M	200
Fluorescent, Deluxe Cool White †	WRATTEN Gelatin No. 85C + 10R	320
Metal Halide	WRATTEN Gelatin No. 85	320

\* These are approximate corrections only. Make final corrections during printing.

† These are starting-point recommendations for trial exposures. If the kind of lamp is unknown, a KODAK Color Compensating Filter CC 40R can be used with an exposure index (EI) of 250.

**Note:** Consult the manufacturer of high-intensity ultraviolet lamps for safety information on ultraviolet radiation and ozone generation.

1. With a KODAK WRATTEN Gelatin Filter No. 85.

## DARKROOM RECOMMENDATIONS

Do not use a safelight. Handle unprocessed film in total darkness.

## EXPOSURE TABLE - TUNGSTEN LIGHT

At 24 frames per second (fps), 170-degree shutter opening:

Lens Aperture	f/1.4	f/2	f/2.8	f/4	f/5.6	f/8	f/11	f/16
Footcandles Required	5	10	20	40	80	160	320	640

Use this table for average subjects that contain a combination of light, medium, and dark colors. When a subject includes only pastels, use at least 1/2 stop less exposure; dark colors require 1/2 stop more exposure.

### Lighting Contrast -

The recommended ratio of key-light-plus-fill-light to fill light is 2:1 or 3:1. However, you may use 4:1 or greater when a particular look is desired.

## RECIPROCITY CHARACTERISTICS

You do not need to make any filter corrections or exposure adjustments for exposure times from 1/1000 of a second to 1 second. In the 10-second range, increase exposure 1 stop and use a KODAK Color Compensating Filter CC 10R.

## PROCESSING

Process in Process ECN-2.

Most commercial motion-picture laboratories provide a processing service for these films. See KODAK Publication No. H-24.07, *Processing KODAK Color Negative Motion Picture Films, Module 7* available online at <http://www.kodak.com/US/plugins/acrobat/en/motion/support/processing/h247/h2407.pdf>, for more information on the solution formulas and the procedure for machine processing these films. There are also pre-packaged kits available for preparing the processing solutions. For more information on the KODAK ECN-2 Kit Chemicals, check Kodak's Motion Picture Films for Professional Use price catalog.

## IDENTIFICATION

After processing, the product code numbers 5219 (35 mm), 7219 (16 mm), or SO-219 (16, 35, and 65 mm; edgeprint shows 0219) emulsion, roll, and strip number identification, KEYCODE Numbers, and manufacturer/film

identification code (EJ) are visible along the length of the film.

## LABORATORY AIM DENSITIES (LAD)

To maintain optimum quality and consistency in the final prints, the laboratory must carefully control the color timing, printing, and duplicating procedures. To aid in color timing and curve placement, negative originals should be timed relative to Laboratory Aim Density (LAD) Control Film supplied by Eastman Kodak Company.<sup>2</sup> The LAD Control Film provides both objective sensitometric control and subjective verification of the duplicating procedures used by the laboratory.

In the LAD Control Method,<sup>3</sup> the electronic color analyzer used for color timing is set-up with the LAD Control Film to produce a gray video display of the LAD patch, corresponding to 1.0 neutral density (gray) on the print. The negative printing original is then scene-to-scene timed. There are specific LAD values for each type of print or duplicating film that the original can be printed on. For print films, the LAD patch is printed to a neutral gray of 1.0 visual density. For duplicating films, the specified aims are at the center of the usable straight-line portion of the sensitometric curve of the film.

Due to normal variations in exposure and processing of color negative films, particular scenes may not print exactly at the same printer lights as the LAD Control Film. The LAD Control Film is intended as a set-up tool for electronic color analyzers and printers. It is NOT a reference that every scene must match. Normal film-to-film and scene-to-scene exposure variability is accommodated by the color timing (grading) process, on an electronic color analyzer set up with the LAD Control Film. Normally exposed and processed color negatives will typically print well within the range of an additive printer setup with the LAD Control Film, although SIGNIFICANT or UNEXPECTED departures from this center point balance may indicate an exposure/filtration problem with the cinematography or with the process control. Some specialized films and/or specialized negative processing techniques (push-processing, pull-processing, "skip-bleach" processing, etc.) may require more extreme adjustment from the LAD printing condition to attain desired results.

More information is contained in KODAK Publication H-61, *Laboratory Aim Density*, available online at <http://www.kodak.com/US/en/motion/support/lad.jhtml>.

## FILM-TO-TAPE TRANSFERS

When you transfer the film directly to tape, you can set up the telecine using KODAK Telecine Analysis Film (TAF)

2. Direct any inquiries to one of the regional sales offices.

3. Use of the LAD Control Method is described in the paper, "A Simplified Motion-Picture Laboratory Control Method for Improved Color Duplication," by John P. Pytlak and Alfred W. Fleischer in the October 1976 SMPTE Journal.

supplied by Eastman Kodak Company. The TAF consists of a neutral density scale and an eight-bar color test pattern with a LAD gray surround.

The TAF gray scale provides the telecine operator (colorist) with an effective way to adjust subcarrier balance and to center the telecine controls before timing and transferring a film. The TAF color bars provide the utility of electronic color bars, even though they do not precisely match the electronically generated color bars. Using the TAF will help obtain optimum quality and consistency in the film-to-tape transfer. For more information regarding TAF, see KODAK Publication No. H-9, *TAF User's Guide*.

## IMAGE STRUCTURE

The modulation-transfer and diffuse rms granularity curves were generated from samples of 5219 Film exposed with tungsten light and processed as recommended in Process ECN-2 chemicals. For more information on image-structure characteristics, see KODAK Publication No. H-1, *KODAK Motion Picture Film* available online at <http://www.kodak.com/US/en/motion/support/h1>.

### Modulation Transfer Function

The "perceived" sharpness of any film depends on various components of the motion picture production system. The camera and projector lenses and film printers, among other factors, all play a role. But the specific sharpness of a film can be measured and is charted in the Modulation Transfer Function Curve.


### rms Granularity:

Refer to curve.

Read with a microdensitometer, (red, green, blue) using a 48-micrometer aperture.

The "perception" of the graininess of any film is highly dependent on scene content, complexity, color, and density. Other factors, such as film age, processing, exposure conditions, and telecine transfer may also have significant effects.

## CURVES

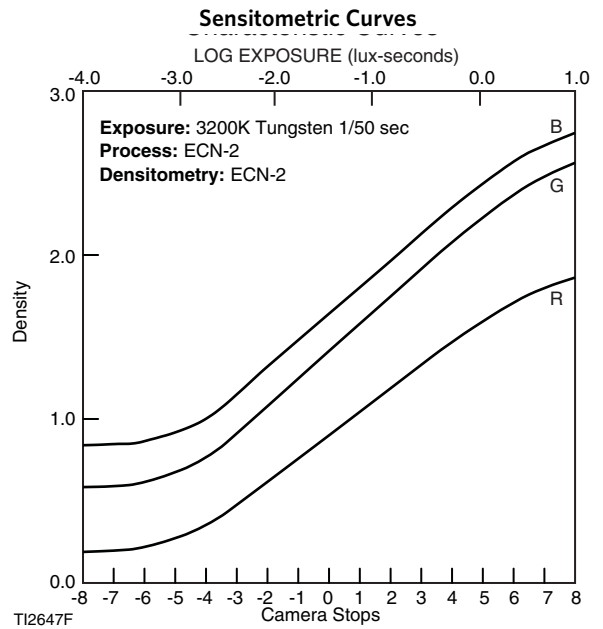


The curves describe this film's response to red, green, and blue light. Sensitometric curves determine the change in density on the film for a given change in log exposure.<sup>4</sup>

**Note:** The exposure scale for VISION3 5219 / 7219 Film is longer than previous VISION and VISION2 Films. Because of the extended highlight latitude of and because we need to measure in this region, we expanded the exposure scale from a zero to four increment to a zero to five scale. In addition to the longer exposure scale, we are plotting twenty-one steps instead of twenty.


**NOTICE:** The sensitometric curves and data in this publication represent product tested under the conditions of exposure and processing specified. They are representative of production coatings, and therefore do not apply directly to a particular box or roll of photographic material. They do not represent standards or specifications that must be met by Eastman Kodak Company. The company reserves the right to change and improve

### Modulation-Transfer Function Curves

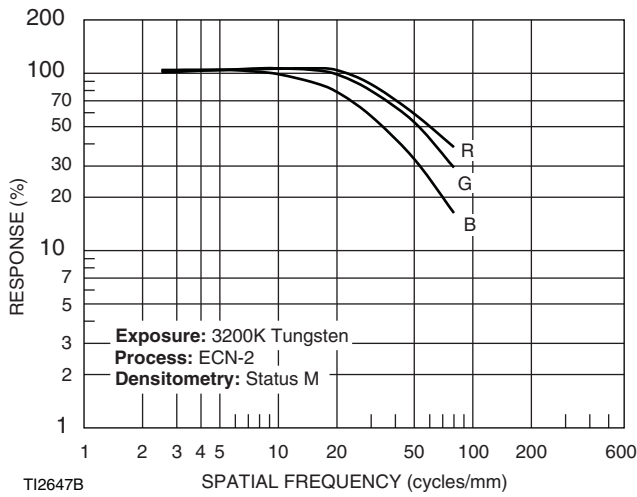


This graph shows a measure of the visual sharpness of this film. The x-axis, "Spatial Frequency," refers to the number of sine waves per millimeter that can be resolved. The y-axis, "Response," corresponds to film sharpness. The longer and flatter the line, the more sine waves per millimeter that can be resolved with a high degree of sharpness—and, the sharper the film.

### Spectral Sensitivity Curves

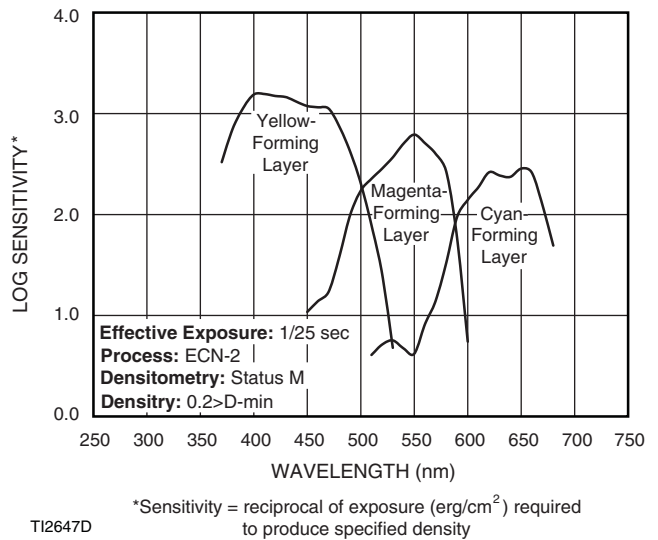

These curves depict the sensitivity of this film to the spectrum of light. They are useful for determining, modifying, and optimizing exposure for blue- and green-screen special-effects work.


### Diffuse rms Granularity Curves

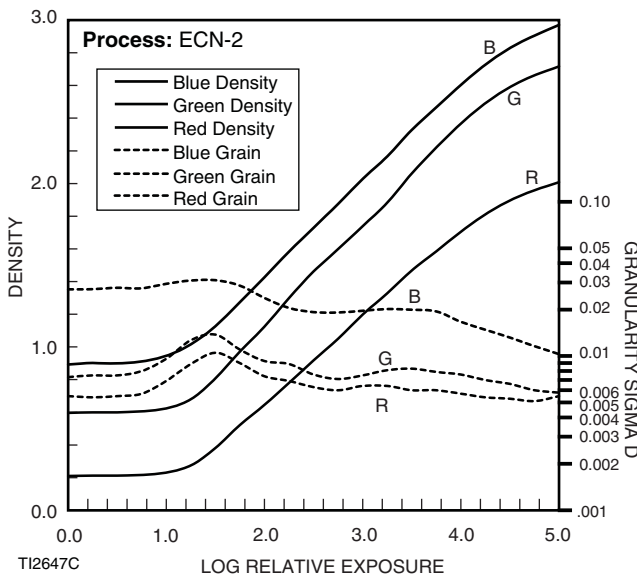

To find the rms Granularity value for a given density, find the density on the left vertical scale and follow horizontally to the characteristic curve and then go vertically (up or down) to the granularity curve. At that point, follow horizontally to the Granularity Sigma D scale on the right. Read the number and multiply by 1000 for the rms value.

**Note:** This curve represents granularity based on modified measuring techniques.<sup>4</sup>

### Spectral Dye Density Curves

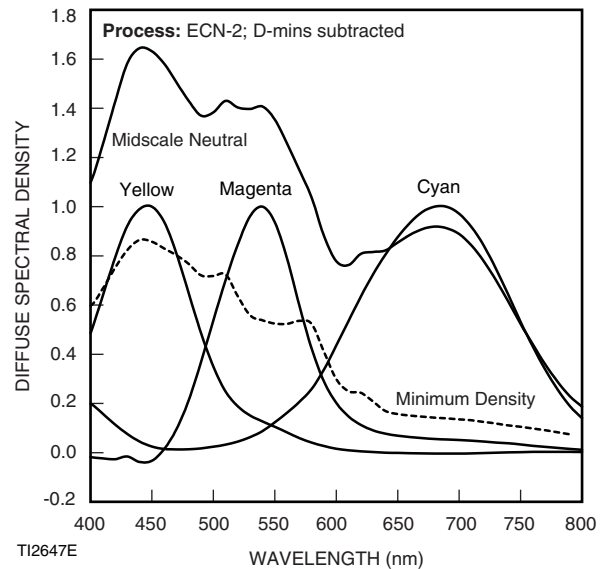

These curves depict the spectral absorptions of the dyes formed when the film is processed. They are useful for adjusting or optimizing any device that scans or prints the film.

**Note:** Cyan, Magenta, and Yellow Dye Curves are peak-normalized.

4. Sensitometric and Diffuse RMS Granularity curves are produced on different equipment. A slight variation in curve shape may be noticed.

## SIZES AVAILABLE

### Standard Products Available

Identification No.	Length in Metres (Feet)	Core	Description	Perforations
65 mm SP332	305 (1000)	P	Emulsion In	KS-4740 (KS-1866)
35 mm SP417	30 (100)	S-83 100-ft. spool		BH-4740 (BH-1866)
35 mm SP718	61 (200)	U		BH-4740 (BH-1866)
35 mm SP718	122 (400)	U		BH-4740 (BH-1866)
35 mm SP718	305 (1000)	U		BH-4740 (BH-1866)
16 mm SP449	30 (100)	R-90 100-ft. spool		2R-7605 (2R-2994)
16 mm SP451	122 (400)	T		2R-7605 (2R-2994)
16 mm SP578	122 (400)	S-153 400-ft. spool		2R-7605 (2R-2994)
16 mm SP445*	61 (200)	A	Winding A	1R-7620 (1R-3000)
16 mm SP455	30 (100)	R-90 100-ft. spool	Winding B	1R-7605 (1R-2994)
16 mm SP457	122 (400)	T	Winding B	1R-7605 (1R-2994)
16 mm SP458	244 (800)	Z	Winding B	1R-7605 (1R-2994)
16 mm SP462N	15 (50)	R-236 50-ft.spool		2R-7605 (2R-3000)
S8 mm SP464	15 (50)		Super 8 cartridge	

\*for AATON A-MINIMA Cameras

## MORE INFORMATION

Outside the United States and Canada, please contact your Kodak representative.

You can also visit our web site at [www.kodak.com/go/motion](http://www.kodak.com/go/motion) for further information. You may want to bookmark our location so you can find us easily the next time.

<b>Films</b>	<i>Film for the Cinematographer</i> KODAK Publication No. H-5
<b>Image Structure</b>	<i>KODAK Motion Picture Film</i> KODAK Publication No. H-1
<b>Storage</b>	<i>KODAK Motion Picture Film</i> KODAK Publication No. H-1  <i>The Book of Film Care</i> KODAK Publication No. H-23
<b>Processing</b>	<i>Manual for Processing KODAK Motion Picture Films, Process ECN-2 Specifications, Module 7</i> KODAK Publication No. H-24.07
<b>LAD</b>	<i>LAD—Laboratory Aim Density</i> KODAK Publication No. H-61
<b>Transfer</b>	<i>KODAK Telecine Analysis Film User's Guide</i> KODAK Publication No. H-822  <i>KODAK Telecine Exposure Calibration Film User's Guide</i> KODAK Publication No. H-807

# KODAK VISION3 500T Color Negative Film 5219 / 7219 / SO-219

FOR DIRECT ORDERING IN THE UNITED STATES AND CANADA: 1-800-621-FILM

KODAK SHOOTSAVER Film Delivery Service (U.S. only) 1-800-404-2016

## Kodak Locations

### NORTH AMERICA REGION UNITED STATES

**Hollywood, California**  
6700 Santa Monica Boulevard  
Los Angeles, California  
90038-1203  
Tel: 323-464-6131  
Orders: 1-800-621-FILM

**New York, New York**  
360 West 31st Street  
New York, New York  
10001-2727  
Tel: 212-631-3400  
Orders: 1-800-621-FILM

**CANADA**  
Kodak Canada Inc.  
6 Monogram Place  
2nd Floor  
Toronto, Ontario  
Canada M9R 0A1  
Tel: 416-761-4646  
Orders: 1-800-621-FILM  
Fax: 416-760-4592  
Toll Free Fax: 1-866-211-6311

Kodak Canada Inc.  
4 Place du Commerce, Suite 100  
Ile des Soeurs  
Verdun, Quebec  
Canada H3E 1J4  
Orders: 1-800-621-FILM  
Fax: 1-866-211-6311

Kodak Canada Inc.  
3700 Gilmore Way  
Burnaby, BC  
Canada V5G 4M1  
Orders: 1-800-621-FILM  
Fax: 1-866-211-6311

### EUROPEAN, AFRICAN AND MIDDLE EASTERN REGION Kodak Business Centre

Hemel One, Boundary Way  
Hemel Hempstead  
HP2 7YU  
England, UK  
Tel: + 44 1442 846945  
Fax: + 44 1442 846 594

**Eastman Kodak SARL**  
29-31 Route de L'Aéroport  
Le Grand Saconnex  
Case Postale 271  
1215 Geneva 15  
Switzerland  
Tel: +41-22-747-2000  
Fax: +41-22-747-2200

**LATIN AMERICA REGION**  
1900 NW 97 Ave.  
Miami, Florida 33172 USA  
Tel: 305 378-0566 / 305 229-0422  
Fax: 305 378-0495 / 305 229-5075  
www.kodak.com/go/latinmotion

**MEXICO**  
Kodak Mexicana S.A. de C.V.  
Blvd. Adolfo Ruiz Cortinez 3642, Piso 14  
Col. Jardines del Pedregal  
Del. Alvaro Obregon  
CP 01900 México, D.F. Mexico.  
Tel: 01 (55) 110517-30  
Fax: 01 (55) 110517-07  
www.kodak.com/go/latinmotion

**BRAZIL**  
**KODAK BRASILEIRACOM. PROD.  
PARA IMAGEM SERVIÇOS LTDA**  
Rodovia Presidente Dutra -  
Km154.7  
Sao José dos Campos-SP  
CEP 12240-427, Brazil  
Tel: 0800 015 0002  
Tel: 55 11 2132-6003 (Kodak Sao Paulo)  
Tel: 55 21 8151-9923 (Kodak Rio de Janeiro)  
Fax 55 12 3932-6721  
www.kodak.com/go/latinmotion

**VENEZUELA**  
Kodak Venezuela S. A.  
Av. Francisco de Miranda  
Centro Lido, Torre B, Piso 7, Of. 71A y  
72B  
El Rosal, Caracas-Venezuela  
Tel: (58-212) 955-2081  
Fax: (58-212) 955-2009  
www.kodak.com/go/latinmotion

**PERU**  
Kodak Américas, Ltd.  
Avenida Larco # 1301, Piso 14,  
Miraflores  
Lima, Perú  
Tel: (51-1) 610-8700  
Fax: (51-1) 610-8801  
www.kodak.com/go/latinmotion

**ARGENTINA**  
El Business Center  
Bonpland 1930-32  
CP 1414 Buenos Aires, Argentina  
Tel: 54-11-4778-7009 /  
54-911-5932-9503  
Fax: 54-11-4773-6105  
www.kodak.com/go/latinmotion

**CHILE**  
Kodak Chilena S.A.F.  
Edificio Torre Oriente  
Av. Alonso de Córdoba# 5151, Piso 14  
Comuna Las Condes  
Santiago, Chile  
Tel: 56.99.220.5609  
www.kodak.com/go/latinmotion

**ASIA PACIFIC REGION**  
**AUSTRALIA**  
**Melbourne**  
Kodak (Australia) Pty. Ltd.  
181 Victoria Parade  
Collingwood, Victoria, 3066  
Australia  
Tel: 61 3 8417 8520  
Fax: 61 3 8417 8011  
E-mail: mpfilmoz@kodak.com  
www.kodak.com.au/go/motion

**Sydney**  
Level 4, 68-72 Waterloo Road  
North Ryde, NSW 2113  
Australia  
Tel: 61 2 9870 4378  
Fax: 61 2 9870 4292

**CHINA (Peoples Republic)  
Kodak (China) Limited**  
**Beijing Liaison Office**  
9th Floor, Beijing Kerry Centre  
1 Guanghua Road  
Chaoyang District  
Beijing 100020 China  
Tel: 8610 6561 6561  
Fax: 8610 6561 2199

**Shanghai Liaison Office**  
Building 8 Jinqiao Office Park  
No 27 Xin Qiao Road  
Pudong, Shanghai 201206 China  
Tel: 8621 5884 1000  
Fax: 8621 58841666

**Guangzhou Liaison Office**  
10F, Office Tower  
China Hotel by Marriott  
Liu Hua Road  
GuangZhou 510015 China  
Tel: 8620 8666 9888  
Fax: 8620 8667 2230  
www.kodak.cn/go/motion

**HONG KONG**  
**Kodak (Hong Kong) Ltd.**  
13/F, Cityplaza Four  
12 Taikoo Wan Road  
Taikoo Shing  
Hong Kong  
Tel: 852 2564 9352  
Fax: 852 2564 9830  
www.kodak.com.hk/go/motion

**INDIA**  
**Kodak India Private Limited**  
3rd Floor, Kalpataru Synergy  
Off Western Express Highway  
Vakola, Santacruz (East)  
Mumbai 400 055 India  
Tel: 91 22 6641 6762  
Fax: 91 22 6641 6769  
www.kodak.co.in/go/motion

**INDONESIA**  
**PT. Interdelta Tbk (Kodak Motion  
Picture Authorized Distributor in  
Indonesia)**  
Tel: 6221 652 333 ext. 250  
Mobile: 6281 896 6655  
Email: motionpicture@intedelta.co.id

**JAPAN**  
**Kodak Japan Ltd.**  
Tokyo Sumitomo Twin Building (East)  
27-1, Shinkawa 2-chome, Chuo-ku  
Tokyo 104-0033  
Japan  
Tel: 813 5540 2280  
Fax: 813 5540 2281  
e-mail: motionjp@kodak.com  
www.kodak.co.jp/go/motion/

**KOREA**  
**Kodak Korea Ltd**  
7th Floor. Yakult Building  
28-10, Jamwon-dong, Seocho-gu  
Seoul 137-904  
Korea  
Tel: 822 3438 2620  
Fax: 822 3438 2663/2664  
www.kr.kodak.com/go/motion

**MALAYSIA**  
5th Floor, Block A  
Peremba Square  
Saujana Resort, Sec. U2  
40150 Shah Alam  
Selangor  
Malaysia  
Tel: 603 7680 3338  
Fax: 603 7680 3333

**NEW ZEALAND**  
Kodak New Zealand Ltd.  
Suite 4B  
125 The Strand  
Parnell 1010  
Auckland  
New Zealand  
Tel: 64 9 3028665  
Fax: 649 302 8639  
www.kodak.co.nz/go/motion

**PAKISTAN**  
Kodak Ltd Pakistan Branch  
5th Floor Bahria Complex 2  
M.T.Khan Road  
Karachi  
Pakistan  
Tel: 92 21 561 0150 & 561 1402  
Fax: 92 21 561 0776

**PHILIPPINES**  
Kodak Philippines Ltd.  
2247 Chino Roces Avenue  
Makati City  
Philippines 1231  
Tel: 632 810 0331 (trunkline) or 632  
813 7916 (direct line)  
Fax: 632 840 1956

**SINGAPORE**  
Kodak (Singapore) Pte Ltd  
151 Lorong Chuan (Lobby A)  
#05-01, New Tech Park  
Singapore 556741  
Tel: 65 6371 3388  
Fax: 65 6371 3377

**TAIWAN**  
Kodak Taiwan Limited  
Shin Kong Life Neihu Technology  
Building  
3F-1, No.301, Sec. 2, Tiding Blvd.  
Neihu District  
Taipei 11493  
Taiwan, R.O.C.  
Tel: 886 2 8751 8282  
www.kodak.com.tw/go/motion

**THAILAND**  
Kodak (Thailand) Ltd.  
Floors 6 - 8th Kasemsap Bldg.  
89/1 Moo 14, Vibhavadee-rangsit Rd.  
Chatuchak  
Bangkok 10900  
Thailand  
Tel: 66 2 515 8092

# Kodak